



Standard DC Connector Options

for Powdec External Products

50 piece minimum order may apply



Min-Din Connector

Suffixes PM3 / PM4 / PM5 / PM6
Conulst factory for pin assignments

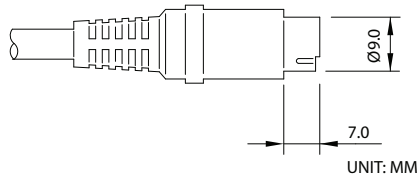

Din Connector


Suffixes PD3 / PD4 / PD5 / PD6
Conulst factory for pin assignments

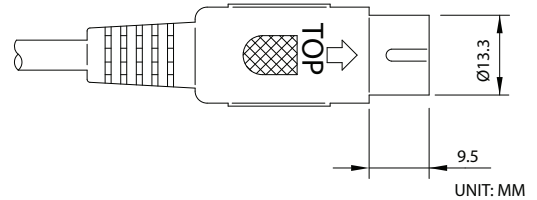

Straight Barrel Jack Connector

Suffixes PA## (see table)
Add "N" for Center Hole Negative Polarity


SUFFIX	DIM A	DIM B	DIM C
PA01	5.5	2.1	9.5
PA02	5.5	2.5	9.5
PA03	5.5	2.1	12.0
PA04	5.5	2.5	12.0



Straight Phono Connector

Suffixes PB## (see table)
Add "N" for Center Hole Negative Polarity


SUFFIX	DIM A	DIM B	DIM C
PB01	2.5	2.3	14.0
PB02	3.5	3.0	11.0



Right-Angle Barrel Jack Connector

Suffixes PAL## (see table)
Add "N" for Center Hole Negative Polarity

SUFFIX	DIM A	DIM B	DIM C
PAL01	5.5	2.1	9.5
PAL02	5.5	2.5	9.5
PAL03	5.5	2.1	12.0
PAL04	5.5	2.5	12.0



Right-Angle Phono Connector

Suffixes PBL## (see table)
Add "N" for Center Hole Negative Polarity

SUFFIX	DIM A	DIM B	DIM C
PBL01	2.5	2.3	14.0
PBL02	3.5	3.0	11.0

